Twin Arrow & Custom Pipe Markers

RT Series

TA Series

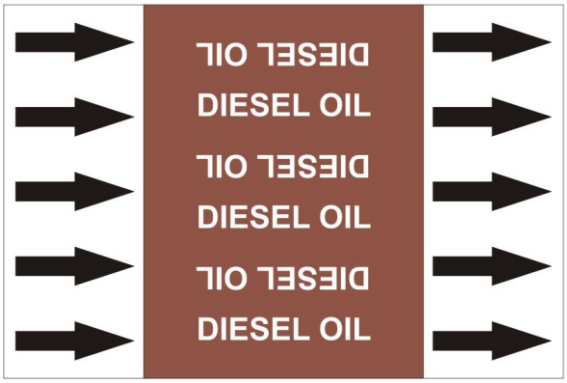

WL Series

Product Specifications

Base Material	UPVC High Performance Film
Adhesive	Solvent Based Acrylic, Permanent
Adhesive Strength	20N/25mm (Finat TM 1/25h)
Ink	Thermal or InkJet printed
Temperature Range	-30°C to +90°C
Thickness	70mym
Durability	5-7 years
Release Paper	PE-Coated Silicone Liner 140g/m2
Flame Retardancy	B-s1, d0
Standards	Bs4800 BS1710 ASME 13.1

Certified CARBONQUOTA 614 gCO_2e/sqm PRODUCT

Certified CARBONQUOTA CARBON MEASURED PRODUCT

** Suitability of the product should be independently determined prior to use*

CSI Manufacturing Limited
Unit 5 Redcow Interchange Estate, Turnpike Road,
Ballymount, Dublin 22
Tel: 01 4641488 Email: info@csionline.ie